
RELIABILITY™

Provin

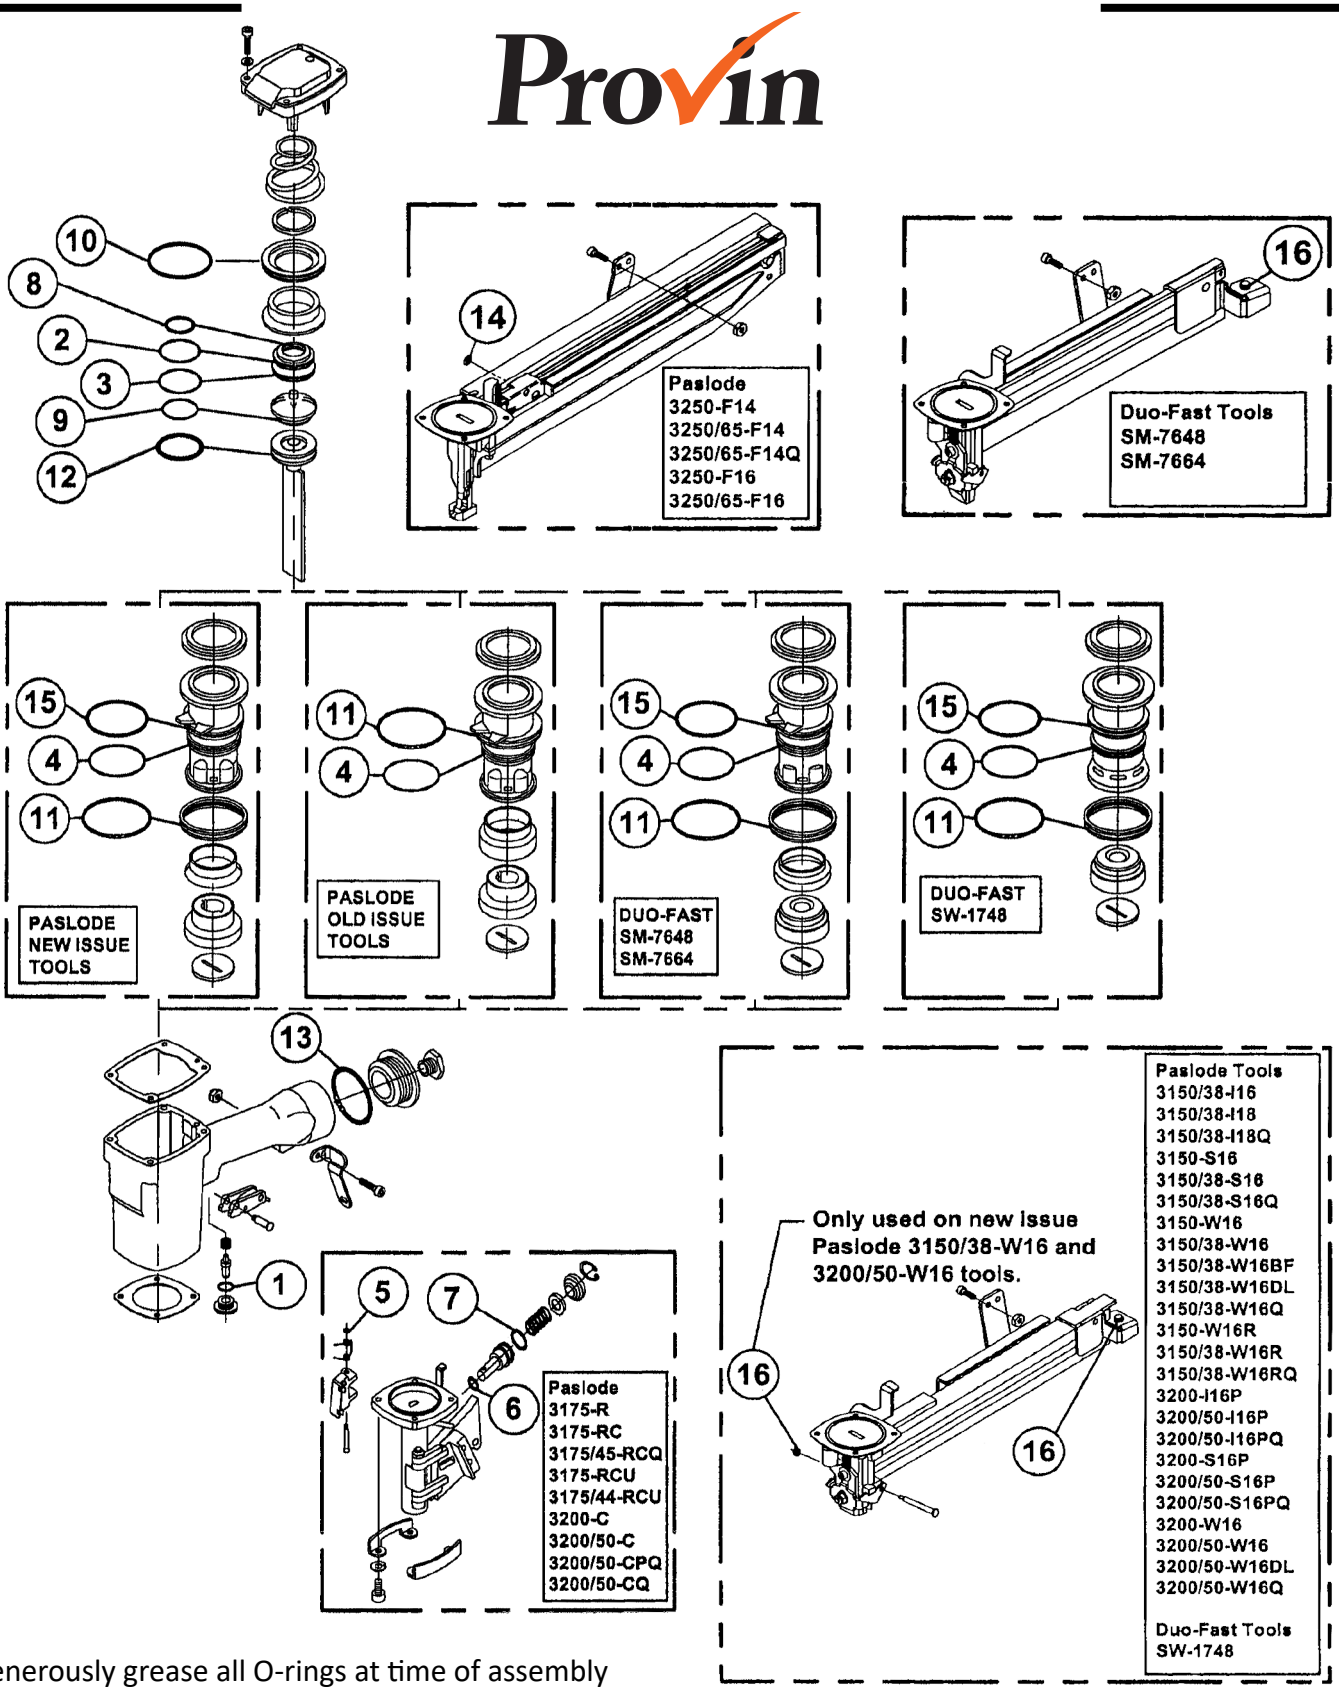

*Generously grease all O-rings at time of assembly

Note:Read and understand the safety information printed on the reverse side before repairing any tools.
Nota: Lea y comprende la informacion de seguridad impresa al reverso antes de reparar cualquier herramienta.

8/23/2007	Exploded View and O-ring List for PASLODE 3100-3200 Series DUO-FAST SM-7648, SM-7664, & SW-1748	VL-PA-310

Contents of O-Ring Kit KT-PA-310

Performance Provin Inc.				Equivalent Paslode® Part Number	Equivalent Duo-Fast® Part Number
KEY NO.	Qty	PART NUMBER			
1	1	OR-PP-150		92174	OR-013-70N
2	1	OR-PP-176		92775	SM-100-1
3	1	OR-PP-178		92773	SM-100-2
4	1	OR-PP-186		402729	SM-100-9
5	1	OR-PP-328	Note 3	402486	
6	1	OR-PP-342	Note 3	402031	
7	1	OR-PP-350	Note 3	92709	
8	1	OR-PP-358		90927	SM-100-3
9	1	OR-PP-368		404256	SM-100-4
10	1	OR-PP-394		91537	SM-100-5
11	1	OR-PP-400		402728	SM-100-7
12	1	OR-PP-562		402723	SM-100-6
13	1	OR-PP-568		91591	SM-100-8
14	1	OR-PP-140	Note 2	94295	
15	1	OR-PP-392	Orange	91966	SM-100-10
16	2	OR-PP-332S	Note 4	402668	NSP-106-2

NOTE 2.
Only used on Paslode tools 3250/65-F14, 3250/65-F14Q and 3250/65-F16 tools. O-Ring is used to hold the Roller, Negator to the Follower Assy.

NOTE 3.
Only used on Paslode Tools 3175-RC, 3175-RCQ, 3200/50-C and 3200/50-CQ tools.

NOTE 4.
New issue Paslode tools- (3150/38-W16 & 3200/50-W16) use (2) OR-PP-332S O-Rings and old issue Paslode tools (3150/38-W16 & 3200/50-W16) use (1) OR-PP-332S O-Ring.

MAGAZINE VIEW NOT SHOWN
(NO O-RINGS INVOLVED)

Paslode
3150-N18
3150/38-N18
3150/38-N18Q

CAUTION CAUTION CAUTION

ALWAYS WEAR SAFETY GLASSES WITH SIDE SHIELDS WHEN USING PNEUMATICALLY OPERATED FASTENER DRIVING TOOLS

NEVER POINT THE TOOL AT YOURSELF OR ANYONE ELSE

NEVER BYPASS OR REMOVE ANY SAFETY DEVICE

ALWAYS FOLLOW THE ORIGINAL MANUFACTURE'S SAFETY AND SERVICE INSTRUCTION

NEVER ATTEMPT TO SERVICE OR REPAIR A PNEUMATICALLY OPERATED TOOL WITH THE COMPRESSES AIR LINE CONNECTED TO THE TOOL

NEVER LEAVE A PNEUMATICALLY OPERATED TOOL UNATTENDED WITH THE COMPRESSES AIR LINE CONNECTED

ALWAYS FOLLOW THE ORIGINAL TOOLS MANUFACTURE'S DISASSEMBLY, ASSEMBLY, AND TOOL INSPECTION PROCEDURES

PRECAUTION PRECAUTION PRECAUTION

SIEMPRE USE LENTES DE SEGURIDAD CON PROTECTORES LATERALES AL USAR HERRAMIENTAS DE IMPULSO CON SUJETADOR DE OPERACIÓN NEUMÁTICA

NUNCA APUNTE A SI MISMO O A OTRA PERSONA CON LA HERRAMIENTA

NUNCA EVITE O RETIRE ALGÚN DISPOSITIVO DE SEGURIDAD

SIEMPRE SIGA LAS INSTRUCCIONES DE SEGURIDAD Y SERVICIO DEL FABRICANTE ORIGINAL DE LA HERRAMIENTA

NUNCA INTENTE HACER MANTENIMIENTO O REPARAR UNA HERRAMIENTA DE OPERACIÓN NEUMÁTICA CON LA LINEA DE AIRE COMPRIMIDO CONNECTADA A LA HERRAMIENTA

NUNCA DEJE SIN ATENCION UNA HERRAMIENTA DE OPERACIÓN NEUMÁTICA CON LA LINEA DE AIRE COMPRIMIDO CONECTADA

SIEMPRE SIGE LOS PROCEDIMIENTOS DE DESMONTAJE, MONTAJE, E INSPECCIÓN DEL FABRICANTE ORIGINAL DE LA HERRAMIENTA

O-Ring Kit
KT-PA-310

For use on the following tool models.
Kit contains all O-Rings in these tools.

PASLODE	3100-3200 Series
DUO-FAST	SM-7648 SM-7664 SW-1748

7 12218 00158 7